GHG-TBS All Stainless Steel Torque Hinge

Features

- Hinge with friction torque holds lid / door in desired position
- All stainless steel construction suitable for corrosive environments
- Suitable applications include equipment machinery, display screens, etc.

Notes

- Operating temperature: 0ºC ~ 40ºC
- Recommended for use in pairs, and for both hinges to be of same torque
- Ensure that both hinge shafts are levelled and aligned during installation

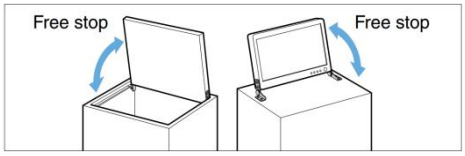

Marking:
GHG-TBS15 - [15]
GHG-TBS25 - [25]



Left-handed type shown.
Right-handed type is symmetrical.



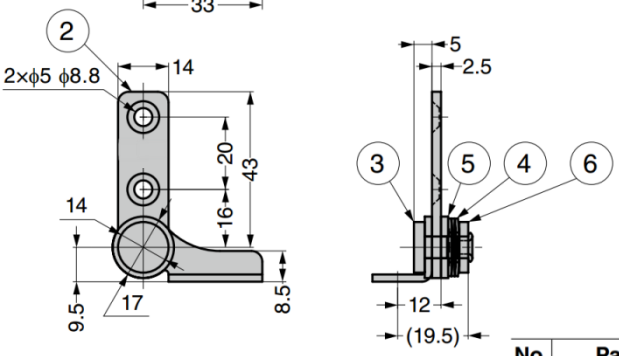

GHG-TBS15L, GHG-TBS25L

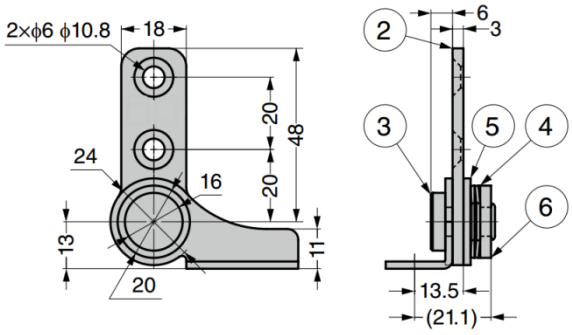

GHG-TBS40L

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Base		
③	Shaft	Stainless Steel (SUS303)	–
④	Spring Washer	Stainless Steel (SUS304)	
⑤	Plate		Barrel Polished
⑥	Washer	Stainless Steel (SUS430)	

Part No.	Type	Opening Angle	Torque (per piece)	
GHG-TBS15R	Right	360º	1.5 ±20% N.m	15.3 ±20% kgf.cm
GHG-TBS15L	Left			
GHG-TBS25R	Right		2.5 ±20% N.m	25.5 ±20% kgf.cm
GHG-TBS25L	Left			
GHG-TBS40R	Right		4.0 ±20% N.m	40.8 ±20% kgf.cm
GHG-TBS40L	Left			