

GM-CFH Stainless Steel 316 Covered Friction Hinge

Features

- Provides constant torque throughout the entire range of motion
- Holds door open at any desired angle without torque adjustment
- Ideal for light weight doors, such as overhead door, glove box, electrical panel, equipment doors, etc.
- Fitted with cover for better aesthetics

Product Performance

- Passed 10,000 cycle test (less than 10% loss of torque) and 20,000 cycles (less than 20% loss of torque)
- Passed 500 hours salt-spray test


Material

- Stainless steel 316




Hold door open at any angle.

Barrel Up Style

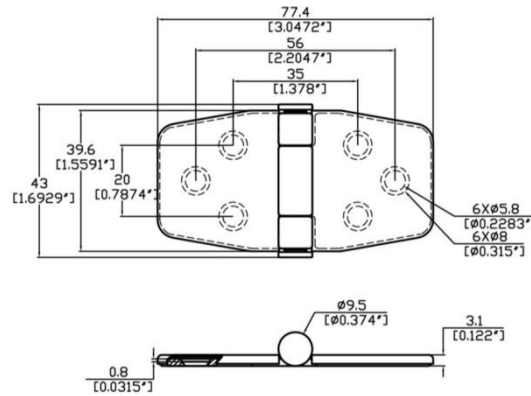

Part No.	Screw Size	Torque (per piece)
GM-CFH-A519423-AH	#8 or M4	1.73 ± 0.23 N.m
GM-CFH-A519423		1.6 ± 0.4 N.m

Barrel Down Style

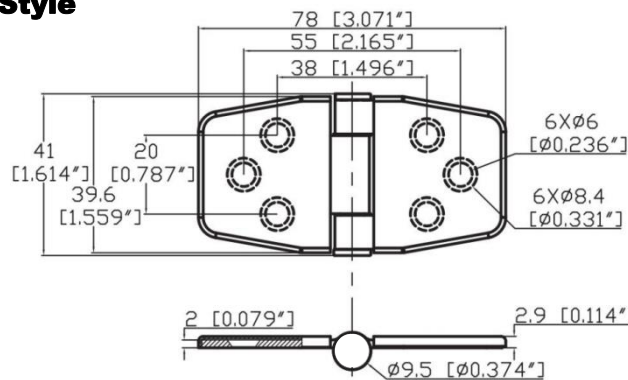

Part No.	Screw Size	Torque (per piece)
GM-CFH-A519523	#8 or M4	2.2 ± 0.7 N.m