

JN Jack Nut

Steel · Slotted body · Standard flange
M4 - M6

The Jack Nut fastener is a flat head slotted body blind rivet nut designed to be installed in soft or brittle materials such as plastic, paper or glass. Its four legs expand behind the parent material providing excellent pull out resistance especially in soft materials.




Features

- Ideal for use in thin, soft or brittle materials
- Won't distort or deform soft plastics or thin sheet metals
- Fastens securely despite burrs or uneven substrate
- Not hole-size sensitive
- Suitable for a wide grip range
- Can be coated with Raintite® to seal moisture and hard plastic PVC to prevent scratching and galvanic corrosion
- Can be set with hand tools

Material

- Steel, zinc plated, clear passivated

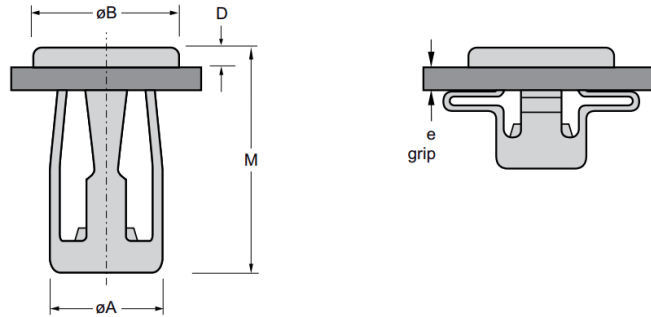

Part No.	Thread Size	Grip Range		Hole Size	øA	øB	D	M
		min.	max.					
JNS-04	M4 x 0.7	0.40	4.80	8.40	8.28	12.20	1.85	16.80
JNL-04		4.80	9.50					21.40
JNS-05	M5 x 0.8	0.40	4.80	10.10	10.06	13.74	1.85	17.90
JNL-05		4.80	9.50					22.20
JNS-06	M6 x 1.0	0.40	4.80	11.50	11.50	16.13	1.90	18.20
JNL-06		4.80	9.50					23.00



Can't find what you are looking for?

We can provide unique and customized solutions.
Contact your nearest [Gripwell](#) team for assistance!