

G3670 Soft Close Full Extension Slide

Max load 20kg · Soft close · Detachable · Bumper

Features

- Full extension (3 members)
- Drawer can be fully pulled out for slide length 300 mm or above
- Soft-closes at 20 mm distance from closed position (slide length 350 mm or below) or 36 mm distance from closed position (slide length 400 mm or above)
- Maximum width of the drawer is the slide length + 200 mm
- Slides smoothly even with some deflection of cabinet due to shock absorbing effect of the outer member installation part
- Drawer / compartment is detachable by lifting the lever

Product Performance

- Passed 50,000 life cycle test




Notes

- Gap between drawer and cabinet beyond the range ※1 in the drawing below may cause unexpected damage to the slide
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage


Parts Included

- Truss head tapping screw 4x12


Self and Soft Closing




Full Extension (3 Members)






Easy to Detach



Simultaneously move the left lever upwards and the right lever downwards.



Move the left and right levers towards you at the same time.

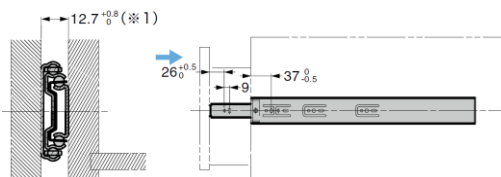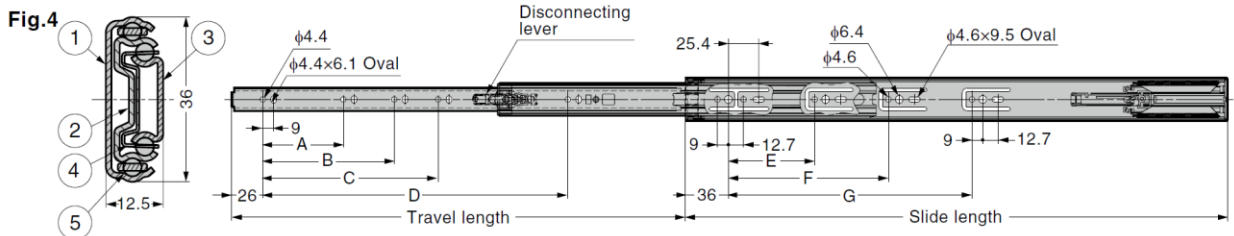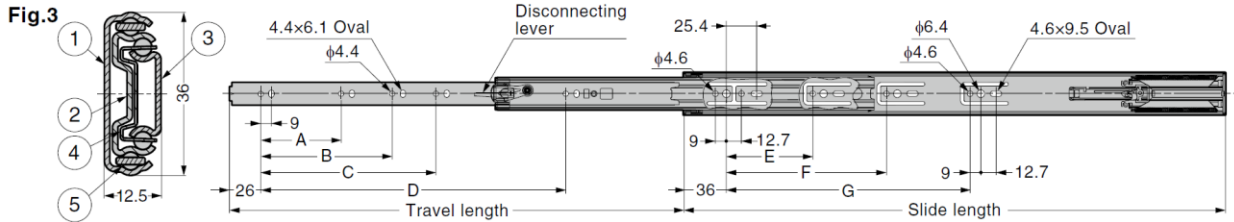

No.	Part Name	Material	Finish/Colour
①	Outer Member	Steel	Clear Zinc Chromate (Trivalent)
②	Intermediate Member		
③	Inner Member		(Zinc Chromate Steel)
④	Retainer		
⑤	Balls		

Sold in pairs

Part No.	Slide Length	Travel Length	A	B	C	D	E	F	G	Load Capacity (per pair)
G3670-250	250	200	124	-	-	-	87	-	-	147 N 15 kg
G3670-300	300	300	174	-	-	-	-	-	-	
G3670-350	350	350	96	224	-	-	-	183	-	
G3670-400	400	400	160	256	-	-	-	199	-	196 N 20 kg
G3670-450	450	450	96	192	306	-	119	247	-	
G3670-500	500	500	-	-	356	-	-	215	295	
G3670-550	550	550	128	224	352	406	-	215	343	
G3670-600	600	600	-	-	384	456	-	247	375	-

※ As soon as stock of this product runs out, slide detaching mechanism will be updated and changed from Fig.1 & 3 to Fig. 2 & 4