

## GA9 Low Profile Compartment Lock

### Features


- Designed with a “shuttered” cylinder for weather protection but with a wider, lower head style for enhanced appearance.
- Neoprene gasket and die cast spacer are provided
- 90° or 180° rotation as shown. For 90° models, key will withdraw in unlocked (9 o'clock) position

### Material

- Steel, bright chromium plated

### Notes

- Cam pawl reversible, can be fitted at 45° intervals
- ‘FT’ keys as standard with ‘shuttered’ keyway. Optionally ‘FS’, ‘92’ or ‘DLP’ keys also available
- Wide choice of cam pawls and finish options available

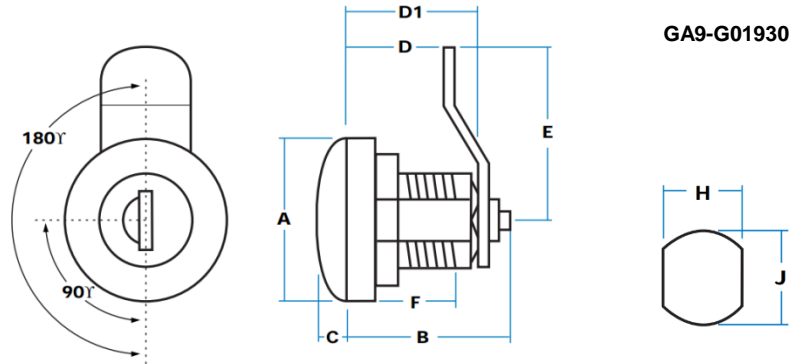

GA9-G01930

Part No.	Rotation	Key Type	A	B	C	D	D1	E	F	G	H	J
GA9-G01930	90°	Mixed	30	29	5	15	22	37	17	6	22	24
GA9-G01930-01		FT111										
GA9-G01931	180°	Mixed										
GA9-G01931-01		FT111										


## GA9 Vehicle Private Door Lock

### Features

- Used with non-locking exterior handles (GB25), these locks have very low profile and twin-lobed operating bar
- Key enters and withdraws vertically with ‘lost motion’ allowed, and 45° movement of bar to each side of rest position
- Mount in special pierced aperture and secure from inside with spring clip
- Supplied as pairs, LH/RH
- Gasket provided.

### Material

- Steel, chromium plated

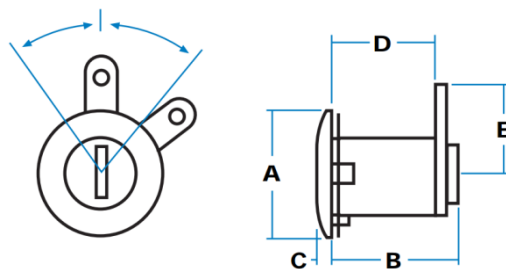

Part No.	A	B	C	D	E
GA9-G29400-1	30	33	2	25	16