

## GESR2021 3/4 Extension Slide

Max load 16kg

### Features

- 3/4 extension (2 members)

### Installation Notes


- When fixing the mounting hole (b), move the inner member backwards and use access hole "e"
- When fixing the mounting hole (c) for slides above 450 mm, move the inner member backwards and use access hole "d"
- Mounting hole (a) is unnecessary in normal installation

### Recommended Screws

- M3 screw with binding or truss head



| No. | Part Name    | Material                 | Finish |
|-----|--------------|--------------------------|--------|
| ①   | Outer Member | Stainless Steel (SUS304) | Plain  |
| ②   | Inner Member |                          |        |
| ③   | Retainer     |                          |        |
| ④   | Balls        |                          | -      |

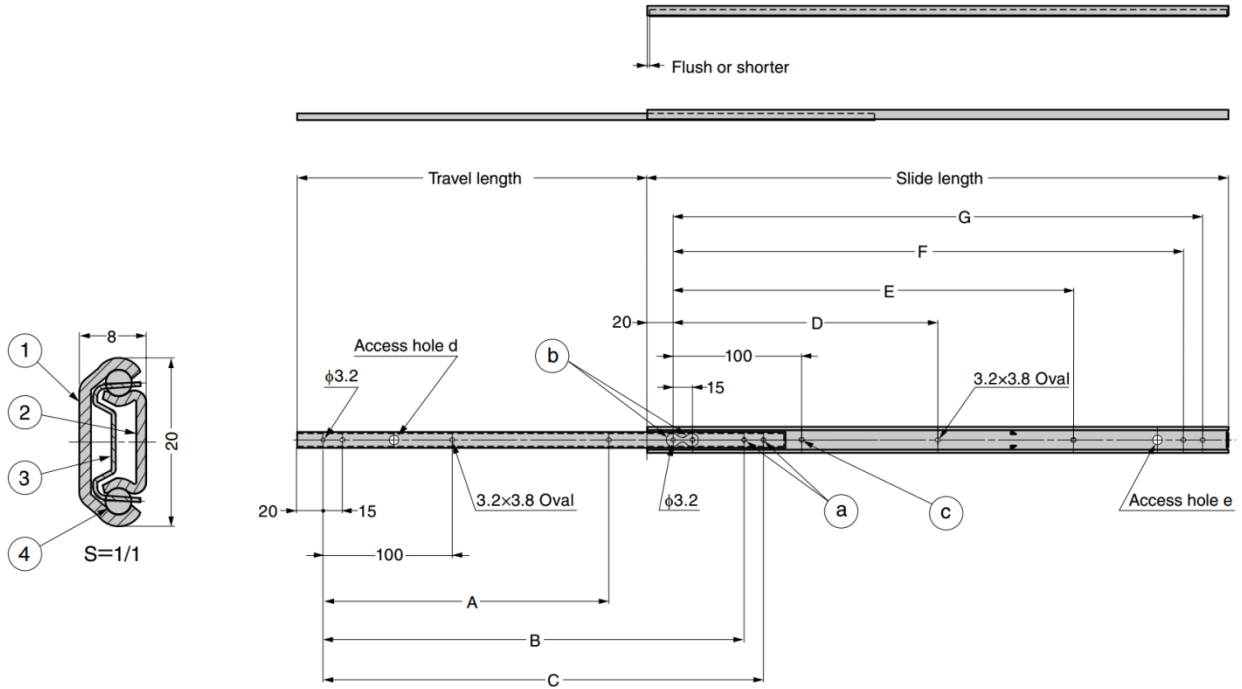

Sold in pieces

| Part No.      | Slide Length | Travel Length | A   | B   | C   | D   | E   | F   | G   | Load Capacity (pair) |
|---------------|--------------|---------------|-----|-----|-----|-----|-----|-----|-----|----------------------|
| GESR2021-200  | 200          | 134           | -   | 145 | 160 | -   | -   | 145 | 160 | 127 N 13 kg          |
| GESR2021-250  | 250          | 184           | 150 | 195 | 210 |     | -   | 195 | 210 | 147 N 15 kg          |
| GESR2021-300  | 300          | 224           | 190 | 245 | 260 |     | 160 | 245 | 260 | 157 N 16 kg          |
| GESR2021-350* | 350          | 244           | 225 | 295 | 310 |     | 210 | 295 | 310 |                      |
| GESR2021-400  | 400          | 294           | 265 | 345 | 360 | 205 | 260 | 345 | 360 | 147 N 15 kg          |
| GESR2021-450  | 450          | 334           | 300 | 395 | 410 |     | 310 | 395 | 410 | 127 N 13 kg          |
| GESR2021-500  | 500          | 384           | 337 | 445 | 460 |     | 230 | 360 | 445 | 460                  |

\* From the next production lot, A = 190