

G4670 Soft Close Full Extension Slide

Max load 40kg · Soft close · Detachable · Bumper

Features

- Full extension (3 members)
- Soft-closes at 20 mm distance from closed position (slide length 350 mm or below) or 36 mm distance from closed position (slide length 400 mm or above)
- With self and soft closing mechanism built-in, easy to install as with conventional slides
- Drawer can be pulled out beyond the slide length for slide length above 350 mm
- Maximum width of the drawer is the slide length + 200 mm
- Slides smoothly even with some deflection of cabinet due to shock absorbing effect of the outer member installation part
- Drawer / compartment is detachable by lifting the lever




Notes

- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.

Parts Included

- Truss head tapping screw 4x12


Self and Soft Closing




Full Extension (3 Members)



Easy to Detach



Simultaneously move the left lever upwards and the right lever downwards.

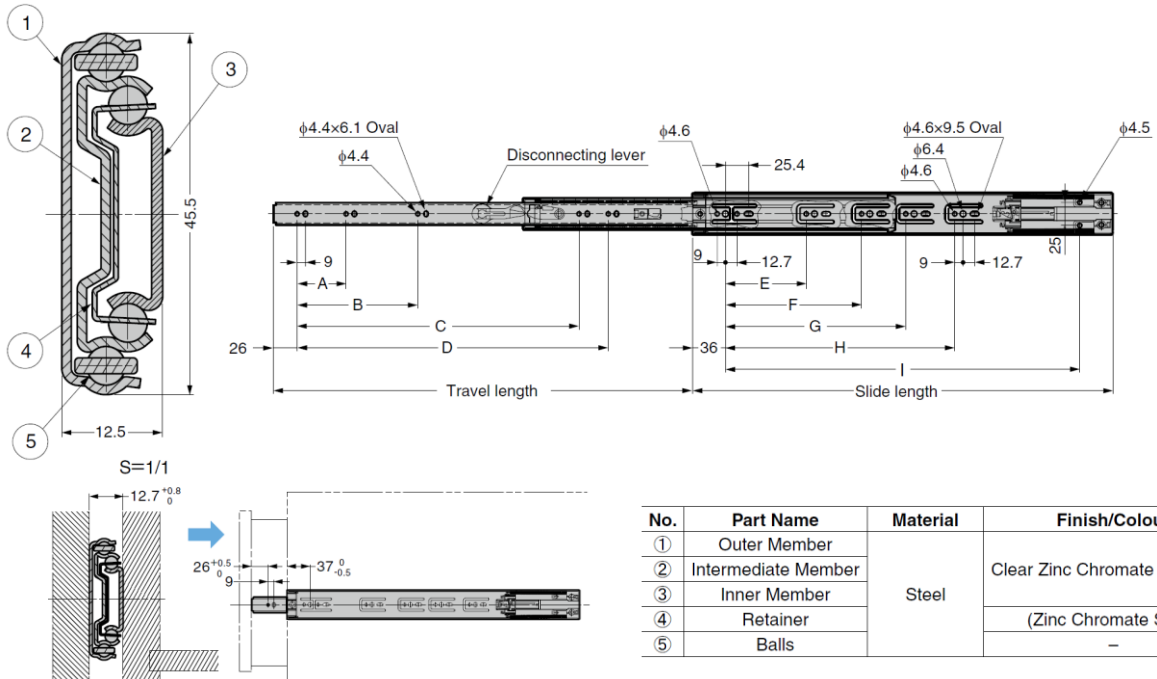

No.	Part Name	Material	Finish/Colour
①	Outer Member	Steel	Clear Zinc Chromate (Trivalent)
②	Intermediate Member		
③	Inner Member		(Zinc Chromate Steel)
④	Retainer		
⑤	Balls		-

Sold in pairs

Part No.	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Load Capacity (per pair)	
G4670-250	250	175	-	-	124	-	87	-	-	-	179	147 N	15 kg
G4670-300	300	275	-	-	174	-	-	-	-	-	229	196 N	20 kg
G4670-350	350	353	96	-	224	-	-	183	-	-	279	245 N	25 kg
G4670-400	400	404	96	-	254	-	-	199	-	-	329	294 N	30 kg
G4670-450	450	455	128	-	294	-	-	247	-	-	379	343 N	35 kg
G4670-500	500	505	96	160	344	-	119	295	-	-	429	392 N	40 kg
G4670-550	550	556	96	160	394	-	-	-	-	-	479	294 N	30 kg
G4670-600	600	606	128	192	444	-	-	-	-	-	529	343 N	35 kg
G4670-650	650	653	128	224	416	494	-	215	343	439	579	294 N	30 kg
G4670-700	700	704	128	224	480	544	-	-	-	487	629	343 N	35 kg