

BAPK Klamp-Tite


Dome head · Aluminium body · Aluminium stem · Multi-grip · Folding
4.8 mm (3/16") - 6.4 mm (1/4")

Features


- Very large blind side bearing area against the rear sheet
- Split tail formation spreads the tail bearing load/clamp load on the rear sheet
- Ideal for use in thin sheet or low strength materials offering high resistance to pull-out loads
- Multi-grip capability accommodates wide variations in material thickness
- Retained stem provides very strong, vibration resistant joints avoiding problems caused by loose stems

Material

- Body: Aluminium alloy 5056, wax lubricated
- Stem: Aluminium alloy 2024/5056, wax lubricated

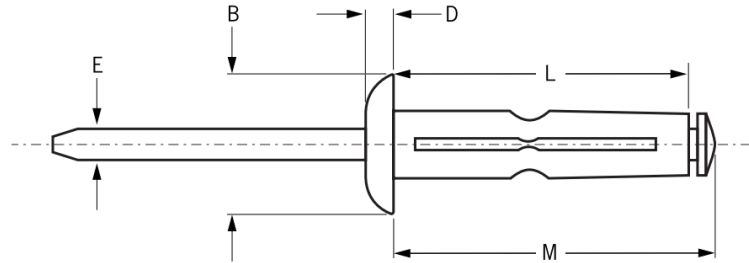

Part No.	Size Ø	Grip Range		Hole Size		M	ØB	D	L	ØE	Shear (typical)	Tension (typical)
	nom.	min.	max.	min.	max.	max.	± 0.4	ref.	max.	ref.	kN	kN
BAPK-06-04	4.8 (3/16")	1.27	6.35	5.18	5.31	25.4	11.3	2.4	22.8	2.9	1.30	1.69
BAPK-06-06		4.75	9.53			27.9			25.2			
BAPK-06-09		9.53	14.27			31.0			28.3			
BAPK-08-04	6.4 (1/4")	1.52	6.35	6.40	6.65	26.5	14.2	3.0	23.5	3.8	1.87	2.62
BAPK-08-06		4.75	9.53			29.7			26.7			

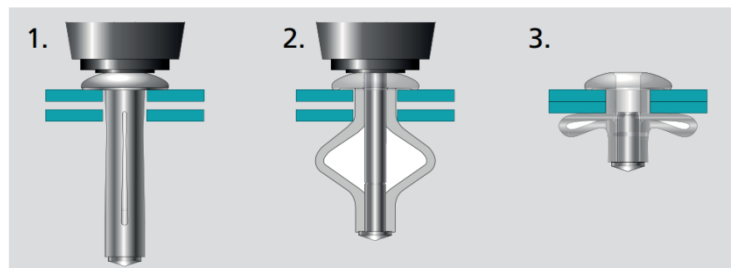

Can't find what you are looking for?

We can provide customized finishing and colouring.
Contact your nearest [Gripwell](#) team for assistance!