

2721 Monobolt



Countersunk head · Stainless steel 304 body · Stainless steel 304 stem · Multi-grip
4.8 mm (3/16") - 6.4 mm (1/4")

Features

- Multi-grip structural breakstem fastener
- Fully sealed joint and visible lock for quick and easy inspection
- Excellent hole fill via radially expanded body provides very strong, vibration resistant joints and compensates for irregular, oversized, slotted or misaligned holes
- Good sheet take-up performance for large gap closing capability
- Stem mechanically locked into body avoids damage, electrical problems or rattling caused by loose stems
- High shear and tensile strength

Material

- Body: Stainless steel 304, bright (modified by addition of 3 - 4% copper)
- Stem: Stainless steel 304, natural (modified by addition of 3 - 4% copper)

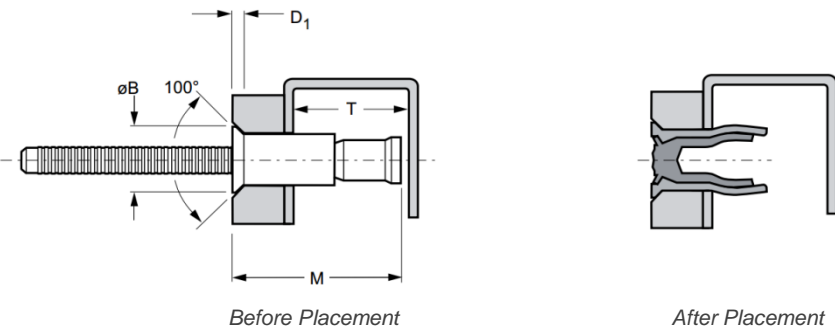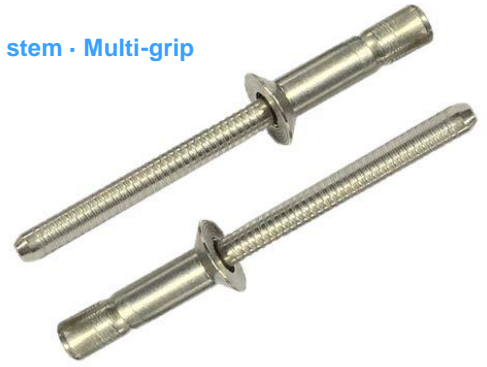

Part No.	Size ø	Grip Range		Hole Size		M	øB	D ₁	T	Shear (typical) kN	Tension (typical) kN
		min.	max.	min.	max.						
02721-00615	4.8 (3/16")	3.17	8.41	4.9	5.1	20.0	8.25	2.2	10.41	6.44	5.11
02721-00821	6.4 (1/4")	3.17	12.07	6.6	7.0	26.4	10.03	2.4	12.19	11.78	10.45



Can't find what you are looking for?

We can provide customized finishing and colouring.
Contact your nearest [Gripwell](#) team for assistance!