

# 93-3 Push-to-Close Knob Latch

Push button to open

### Features

- Push button opening
- Single hole installation
- Optional ejector spring helps prevent rattles

### Accessories






- Pull tab (optional) part number:
  - In-line 93-21-301-14
  - Perpendicular 93-21-322-14
- Keeper (replacement): 93-14-101-24
- Ejector spring (optional): 93-22-302-18
- Flat key, keyed alike CH751 (2 keys per ring): PK-10-01
- Overmolded key, keyed alike CH751 (2 keys per ring): PK-10-01-05

### Material

- Latch: ABS, black
- Spring: Stainless steel

### Product Performance

- Maximum working load: 530 N
- Flammability rating: UL94-HB
- Maximum tightening torque on mounting nut: 7.9 N.m

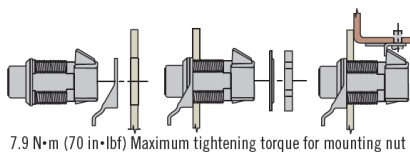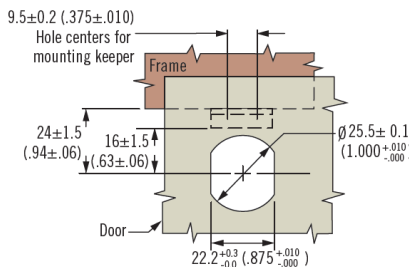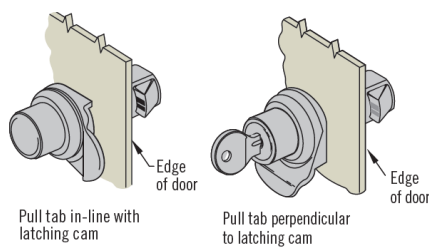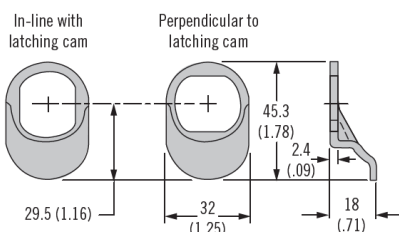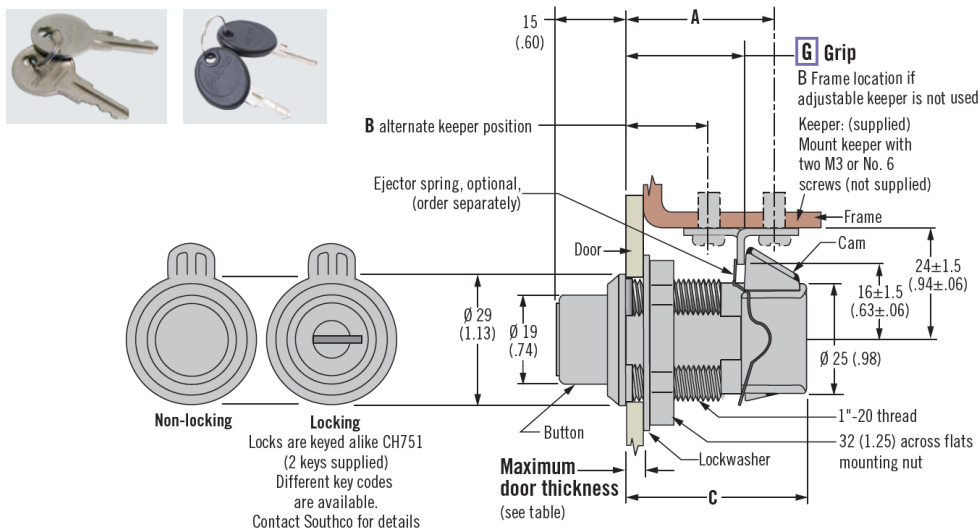

Style	Maximum Door Thickness	Grip	Dimensions			Latch Part Number	
			A	B	C Ref	Key-Locking (2 Flat Keys Supplied)	Non-Locking
Pull tab in-line with latching Cam	10.3 (.407)	23 <sup>+0.1</sup> -.07 (.907 <sup>+0.032</sup> )	29.5±1.5 (1.16±.06)	14.5±1.5 (.57±.06)	37 (1.47)	93-303	93-304
Pull tab perpendicular to latching Cam	10.3 (.407)	23 <sup>+0.1</sup> -.07 (.907 <sup>+0.032</sup> )	29.5±1.5 (1.16±.06)	14.5±1.5 (.57±.06)	37 (1.47)	93-313	93-314
Latch only	12.7 (.500)	25±0.4 (1.000 <sup>+0.032</sup> )	32±1.5 (1.25±.06)	17±1.5 (.66±.06)	40 (1.57)	93-307	93-308