

GMLC-100 Long Stroke Touch Latch

Features

- Long stroke
- No handle needed, just push to open/close
- Non magnetic
- Lightly push to open the door. When closing, arm will catch the counter plate and hold the door with a light push
- Wide tolerance / adjustment range: ± 2 mm vertically and ± 3.5 mm horizontally
- Installation with rivet is possible
- Passed 100,000 life cycle test

Parts Included


- Truss head tapping screws 4 x 16 (SUS)

Recommended Screws

- M4 pan or truss head screw, No.4 rivet



No.	Part Name	Material	Finish / Colour
①	Body 1	Reinforced Nylon	White
②	Body 2	Reinforced PBT	Black
③	Spring	Steel	Coloured Zinc Chromate (Trivalent)
④	Counter Plate	POM	White
⑤	Counter Plate	PBT	Black

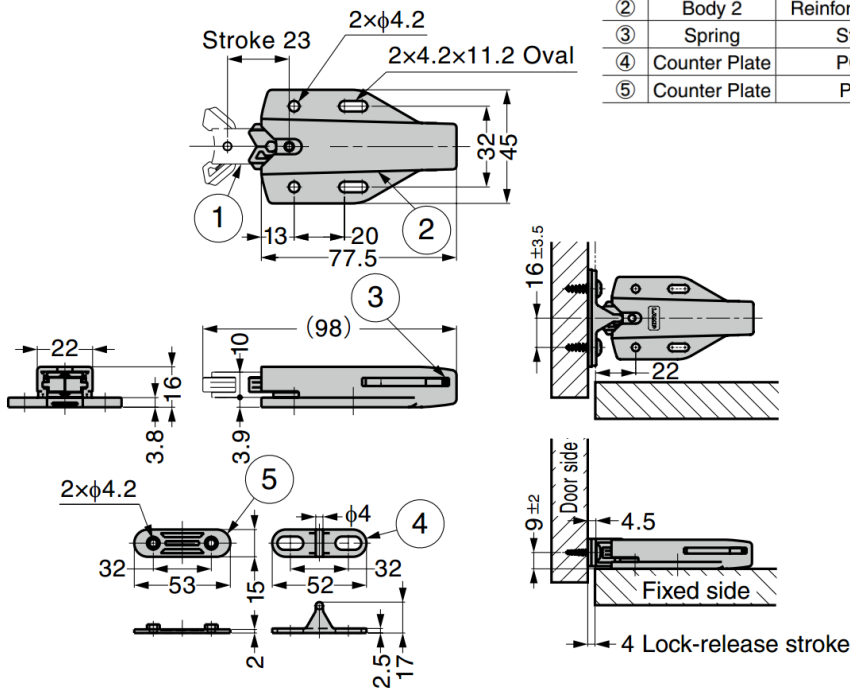


Part No.	Colour	Retaining Force		Push Force	
GMLC-100WT	White	90 N	9.2 kg	14 N	1.4 kg
GMLC-100BL	Black				

GMLC-100-DP5 Spacer

Features

- Spacer for GMLC-100 and GMLC-100DS non-magnetic touch latches
- Spacer allows installation of counter plate to be adjusted by additional 5 mm

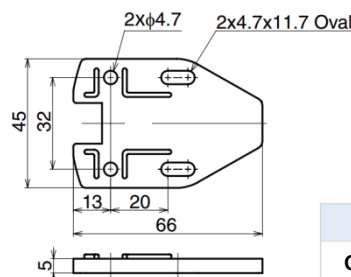

Part No.	Material
GMLC-100-DP5-WT	POM, White