

G4638 Push-To-Open Full Extension Slide

Max load 45kg · Push-to-open · Holds opened · Detachable

Features

- Full extension (3 members)
- Push-to-open mechanism, no handle or knobs required for a sleek, modern look
- Drawer is easily opened by slightly pushing the front plate
- With push-to-open mechanism built-in, easy to install as with conventional slides
- Drawer can be held in fully opened position, release by pressing the front plate
- Drawer / compartment is detachable by lifting the lever
- High load capacity due to sequential mechanism

Recommended Screws


- M4 round head screw, nominal 4 or M4 binding head screw, nominal 4 or M4 truss head screw




Notes

- When the drawer is closed, pressing the front plate may unexpectedly open the drawer
- Do not apply strong shock. Otherwise, the drawer may be opened unexpectedly. Do not pull the drawer strongly in closed position. Otherwise, the slide may be damaged



Self and Soft Closing




Full Extension (3 Members)





Easy to Detach

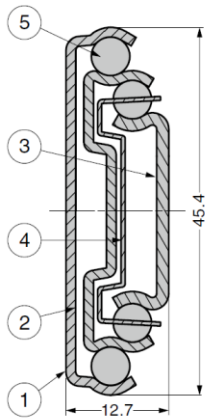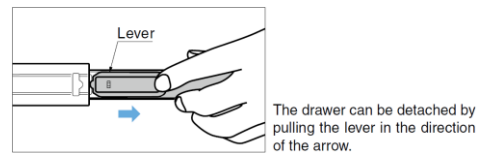

S=1/1

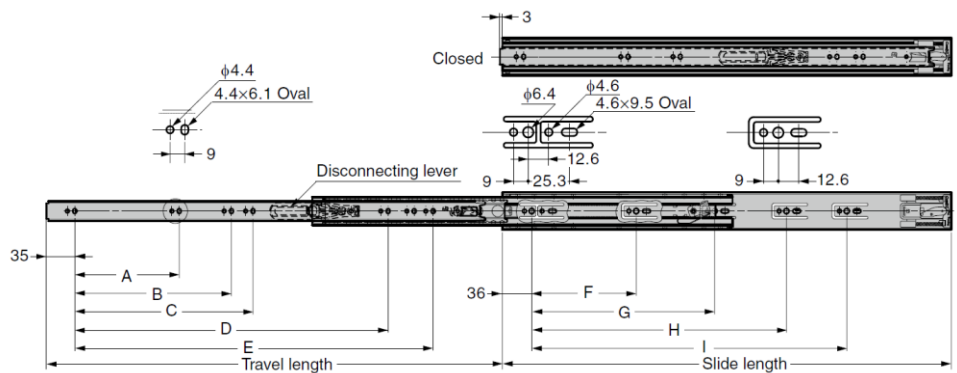

Minimum cabinet depth = drawer length + 7 mm

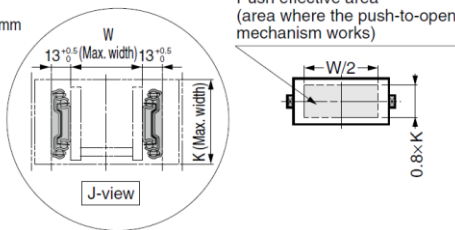

No.	Part Name	Material	Finish
①	Outer Member	Steel	Clear Zinc Chromate
②	Intermediate Member		
③	Inner Member		
④	Retainer		
⑤	Balls		-

Sold in pairs

Part No.	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Max. Drawer Length		Load Capacity (per pair)	
												W	K	N	kg
G4638-14	350	356	-	-	-	-	224	128	-	-	224	550	215	441 N	45 kg
G4638-16	400	406	-	-	-	-	288	-	256	-	-	600	250	422 N	43 kg
G4638-18	450	457	-	-	-	-	320	-	-	320	-	650	280	392 N	40 kg
G4638-20	500	508	-	-	-	-	384	-	224	352	-	700	310	373 N	38 kg
G4638-22	550	559	128	-	-	192	416	-	-	320	416	750	340	353 N	36 kg
G4638-24	600	610										448	800	375	333 N
G4638-26	650	660	224	-	-	416	512	128	-	352	512	850	405	304 N	31 kg
G4638-28	700	711										544	900	435	265 N